


HFT5000 heat shrinkable woven fabric tubing

The HFT5000 was designed primarily to provide mechanical abrasion protection for components such as rubber hoses, plastic pipes, wires and cables. The heat shrinkable woven fabric tube is also suitable for other applications, such as noise and rattle suppression. The woven construction makes HFT5000 tubes extremely flexible and resistant to trapping water, heat and humidity. It provides outstanding abrasion, chafing and cutting protection, even at high temperatures.

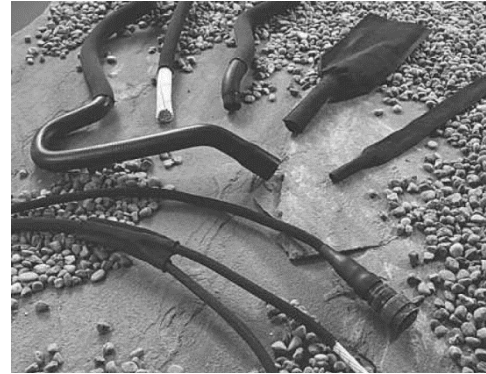

Product facts of HFT5000

- Halogen free
- Highly flexible woven fabric tubing
- Excellent abrasion resistance
- Easy installation
- Heat shrinkable
- Resistant to harsh environment

Minimum shrink temperature	+80°C
Minimum full recovery temperature	+110°C
Operating range	3000h at -40°C to +125°C / 1000h at -40°C to +150°C

Dimensions in mm

Part Number	Inside Diameter		Spools Meter	Colour
	min.	max.		
HFT5000-12/6-0-SP	12	6	500	Black
HFT5000-20/10-0-SP	20	10	400	Black
HFT5000-25/12-0-SP	25	12	400	Black
HFT5000-30/15-0-SP	30	15	400	Black
HFT5000-34/17-0-SP	34	17	350	Black
HFT5000-40/20-0-SP	40	20	300	Black
HFT5000-50/25-0-SP	50	25	200	Black
HFT5000-60/30-0-SP	60	30	200	Black
HFT5000-70/35-0-SP	70	35	150	Black
HFT5000-80/40-0-SP	80	40	100	Black
HFT5000-100/50-0-SP	100	50	100	Black