


## Heat shrink tube, Versafit, very flexible, low shrinking temperature

Versafit heat shrink tubes are a cost-effective choice for many commercial and military applications; electrically insulates and protects inline components, disconnect terminals and splices. Bundles wires for very flexible light-duty harnesses. Strain relieves electrical wire connections for commercial applications. Identifies or color-codes wires, cables, terminals and components.

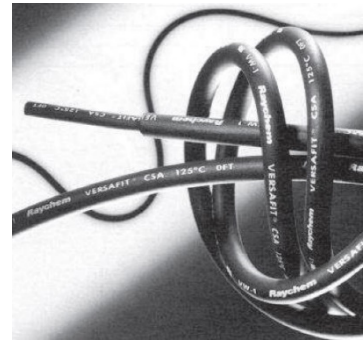

### Product Facts of heat shrink tube Versafit

- 2 : 1 shrink ratio
- Low shrink temperature
- Very flexible
- Highly flame-retardant
- Polyolefin tubing

### Temperature

Operating range	-55°C to +135°C
Min. shrinking temperature	+70°C
Min. full recovery temperature	+90°C

### Specifications and Approvals of heat shrink tube Versafit

- MIL-DTL-23053/12
- Def. Stan. 59-97, Type 5B

### Dimensions in mm

Part Number	Inside Diameter		Wall Thickness	Reel in Meter
	As Supplied	After Heating	After Heating +/- 5%	
VERSAFIT-3/64-0-SP	1.62 +/- 0.2	0.60	0.40	304
VERSAFIT-1/16-0-SP	1.85 +/- 0.2	0.80	0.43	304
VERSAFIT-3/32-0-SP	2.79 +/- 0.2	1.20	0.51	152
VERSAFIT-1/8-0-SP	3.43 +/- 0.2	1.60	0.51	152
VERSAFIT-3/16-0-SP	5.21 +/- 0.3	2.40	0.51	152
VERSAFIT-1/4-0-SP	7.11 +/- 0.3	3.20	0.64	76
VERSAFIT-3/8-0-SP	10.16 +/- 0.4	4.80	0.64	60
VERSAFIT-1/2-0-SP	13.72 +/- 0.4	6.40	0.64	45
VERSAFIT-5/8-0-SP	16.90 +/- 0.4	8.00	0.76	91
VERSAFIT-3/4-0-SP	20.45 +/- 0.4	9.50	0.76	76
VERSAFIT-1-0-SP	25.53 +/- 0.4	12.70	0.89	60
VERSAFIT-1-1/4-0-SP	33.40 +/- 0.7	15.90	1.02	45
VERSAFIT-1-1/2-0-SP	39.88 +/- 0.8	19.10	1.02	38
VERSAFIT-2-0-SP	52.83 +/- 1.0	25.40	1.14	38
VERSAFIT-3-0-SP	78.49 +/- 1.0	38.10	1.27	30
VERSAFIT-4-0-SP	104.14 +/- 1.3	50.80	1.40	30

### Standard Colour

Colour	Black
Ordering Code	0