


Moulded Parts 462A421 to 462A423 (Slim Line, 1 to 3 – Transition, 30° angled)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are with or without coating available.

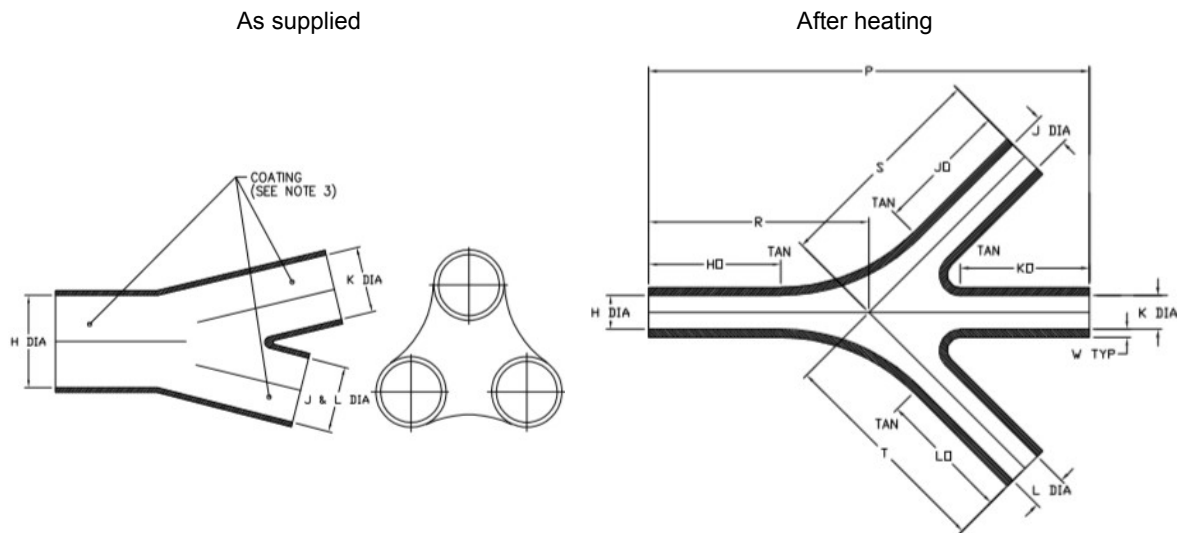

Dimensions in mm

Injection and vent port available only on request

Part Number	Inside diameter (coating reduces Ø max. 1.5mm)		P	R	S	T	HO, JO, KO + LO	W	
	As supplied	After heating							
	H	J, K + L	H	J, K + L	Tolerance +/- 10%		Tolerance +/- 15%		
462A421	19.8	13.2	6.6	6.6	85.9	42.9	42.9	25.4	1.0
462A422	34.3	20.6	11.4	11.4	135.6	67.8	67.8	41.1	1.3
462A423	60.2	36.1	20.1	20.1	207.3	103.6	103.6	63.5	1.5

Material (not all combinations available)

Ordering Code	Material	Operating temperature range
---------------	----------	-----------------------------

Please contact us for material information

Coating, Adhesive

Ordering code	Material	Operating temperature range
---------------	----------	-----------------------------

Please contact us for coating information

Colour

Ordering Code	Colour
---------------	--------

-0 Black