



Moulded Parts 222K121 to 222K185 (right angled, lipped, Instalite)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are with or without coating available.

As supplied

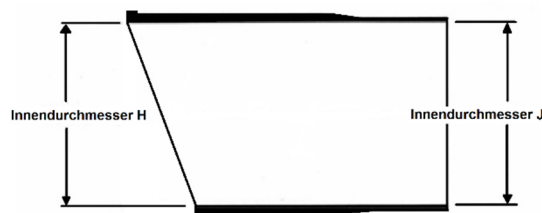

After heating

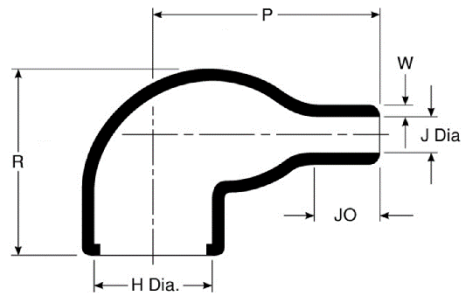

Dimensions in mm

Injection and vent port available only on request

Part number	Inside diameter (coating reduces Ø max. 1.5mm)				P	R	JØ	Wandstärke
	As supplied		After heating					
	H	J	H	J				
222K121-25L-0	24.00	24.00	10.40	5.60	25.00	25.00	30%	1.3
222K132-25L-0	30.00	30.00	14.20	5.90	32.00	27.00	26%	1.3
222K142-25L-0	31.00	31.00	18.00	7.10	39.00	31.00	21%	1.2
222K152-25L-0	36.00	36.00	22.40	8.40	46.00	38.00	26%	1.5
222K163-25L-0	43.00	43.00	28.20	9.90	55.00	45.00	21%	2.0
222K174-25L-0	60.00	60.00	35.10	15.70	80.00	54.00	23%	2.3
222K185-25L-0	66.00	66.00	44.50	16.80	108.00	68.00	25%	1.8

Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-25L	Light weight Polymer, fluid resistant	Please contact us

Coating, Adhesive

Ordering code	Material	Operating temperature range
/225	Epoxy/Polyamide	-75°C to +150°C

Colour

Ordering Code	Colour
-0	Black