


## Moulded Parts 214A511 to 214A552 (rectangular, D-SUB)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are with or without coating available.

As supplied

After heating

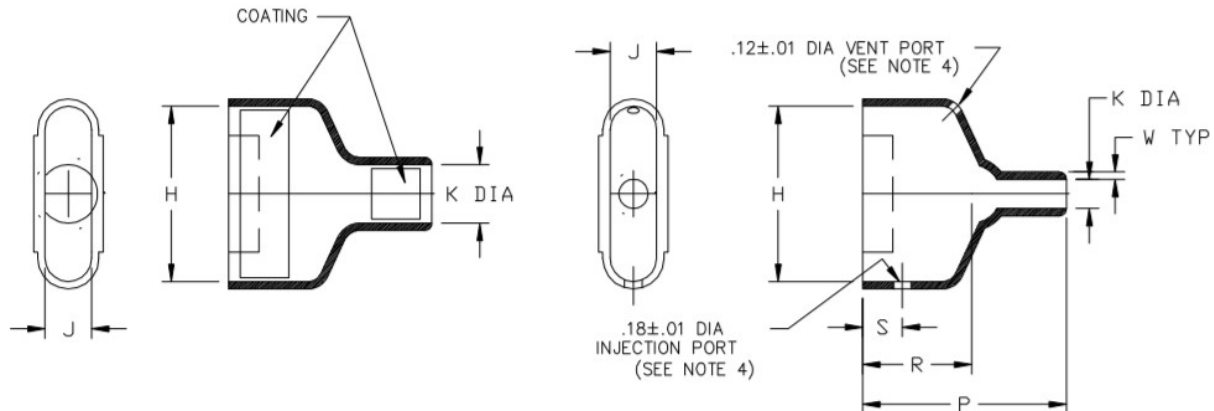

### Dimensions in mm

Injection and vent port available only on request

Part number	Inside diameter (coating reduces Ø max. 1.5mm)						P	R	S	W	Fits to
	As supplied			After heating							
	H	J	K	H	J	K					
214A511	21.1	12.2	7.9	20.3	10.7	4.1	33.3	19.1	7.87	1.02	DED-9
214A521	29.2	12.2	10.2	28.2	10.7	5.3	38.9	22.1	7.87	1.02	DAD-15
214A532	42.9	12.2	14.0	42.2	10.7	8.1	45.0	25.4	7.87	1.02	DBD-25
214A542	59.7	12.2	17.3	58.37	10.7	8.6	53.3	28.4	7.87	1.02	DCD-37
214A552	57.4	15.2	19.1	57.9	13.7	10.7	61.0	31.8	7.87	1.02	DDD-50

### Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-3	Polyolefin, semi-rigid	-55°C to +135°C
-4	Polyolefin, flexible	-55°C to +135°C
-12	Fluoroelastomer, flexible	-55°C to +200°C
-25	Elastomer, fluid resistant	-75°C to +150°C
-100	Polyolefin, halogen free	-30°C to +105°C

### Coating, Adhesive

Ordering code	Material	Operating temperature range
/42	Polyamide, hot-melt	-20°C to +60°C
/86	High performance, hot-melt	-55°C to +120°C
/225	Epoxy/Polyamide	-75°C to +150°C

### Colour

Ordering Code	Colour
-0	Black