


### Moulded Parts 202S121 to 202S174 (shielded, straight boot, lipped)

These shielded moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version offers screening capability and enhanced EMI performance. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are available with or without coating.

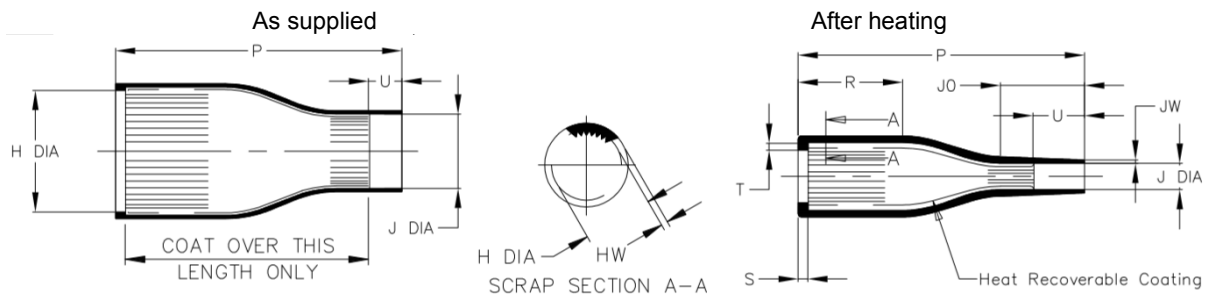

#### Dimensions for material code -25C

Part Number	H	J	P	U	H	J	P	U	R	S	T	HW	JW
	As supplied				After heating								
	+/- 5%				+/-10%		+/- 20%		+/- 30%				
202S121-25C-0	20.0	11.0	45.0	6.0	10.4	5.0	45.0	10.0	17.0	3.0	1.0	2.0	1.0
202S132-25C-0	24.0	15.0	60.0	6.0	14.2	6.0	60.0	10.0	28.0	3.0	1.0	2.0	1.0
202S142-25C-0	31.0	18.0	72.0	6.0	18.0	7.2	72.0	10.0	32.0	3.0	1.0	2.0	1.0
202S152-25C-0	36.0	22.0	85.0	9.0	22.4	8.5	85.0	15.0	31.0	3.0	1.0	2.0	1.0
202S163-25C-0	43.0	26.0	110.0	12.0	28.2	10.0	110.0	20.0	50.0	3.0	1.7	2.2	1.2
202S174-25C-0	47.0	36.0	132.0	12.0	35.1	15.8	135.0	20.0	70.0	3.0	1.7	3.0	1.5

#### Dimensions for material code -100C

Part Number	H	J	P	U	H	J	P	U	R	S	T	HW	JW
	As supplied				After heating								
	+/- 5%				+/-10%		+/- 20%		+/- 30%				
202S121-100C-0	14.0	10.0	45.0	6.0	10.4	5.0	45.0	10.0	17.0	3.0	1.0	2.0	1.0
202S132-100C-0	20.0	12.0	60.0	6.0	14.2	6.0	60.0	10.0	28.0	3.0	1.0	2.0	1.0
202S142-100C-0	26.0	14.0	72.0	6.0	18.0	7.2	72.0	10.0	32.0	3.0	1.0	2.0	1.0
202S152-100C-0	32.0	20.0	85.0	9.0	22.4	8.5	85.0	15.0	31.0	3.0	1.0	2.0	1.0
202S163-100C-0	38.0	24.0	110.0	12.0	28.2	10.0	110.0	20.0	50.0	3.0	1.7	2.2	1.2
202S174-100C-0	41.0	32.0	132.0	12.0	35.1	15.8	135.0	20.0	70.0	3.0	1.7	3.0	1.5

#### Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-25C	Elastomer (VG95343 pt20. Pt22)	-55°C to +150°C
-100C	Halogen free Rayaten (VG95343 NES 711, 713 + 715)	-30°C to +105°C

#### Colour

Ordering Code	Colour
-0	Black