


## Moulded Parts 382S012 to 382S034 (shielded, Y-transition)

These shielded moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version offers screening capability and enhanced EMI performance. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are available with or without coating.

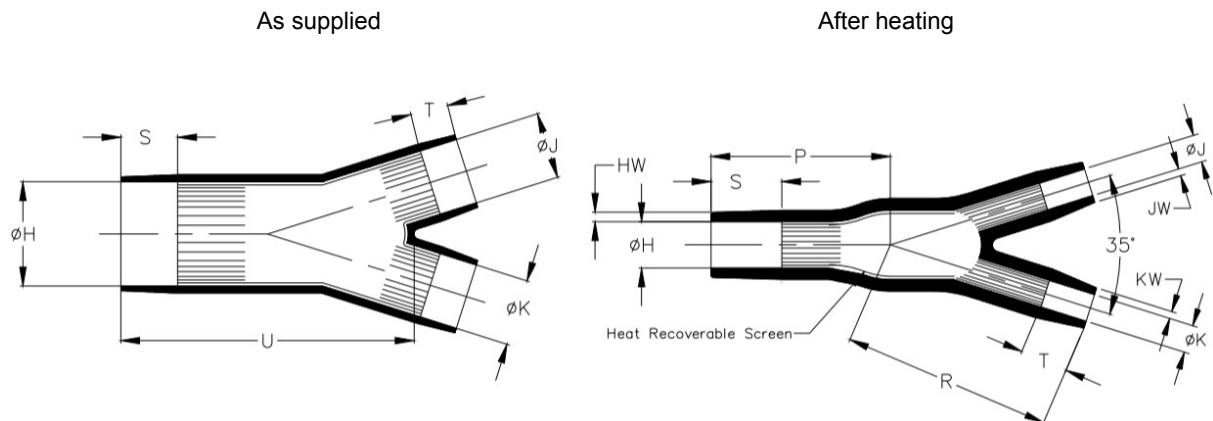

### Dimensions in mm

Part number	H	J + K	S	T	H	J + K	S	T	P	R	U	HW	JW + KW
	As supplied				After heating								
							+/- 20%	+/- 20%			+/- 2%		+/- 20%
382S012-25C-0	15.0	9.0	6.0	6.0	7.6	5.0	10.0	10.0	28.0	35.0	42.0	1.5	1.5
382S023-25C-0	21.0	13.0	10.0	6.0	10.3	6.2	15.0	10.0	38.0	44.0	58.0	2.0	1.5
382S028-25C-0	33.0	20.0	14.0	10.0	15.2	9.4	20.0	15.0	52.0	62.0	80.0	2.3	2.0
382S034-25C-0	40.0	23.0	17.0	13.0	20.0	12.2	25.0	20.0	66.0	82.0	98.0	2.5	2.5

### Material

Ordering Code	Material	Operating temperature range
-25C	Elastomer (VG95343 pt20. Pt22)	-55°C to +150°C
-100C	Halogen free Rayaten (VG95343 NES 711, 713 + 715)	-30°C to +105°C

### Colour

Ordering Code	Colour
-0	Black