



Moulded Parts 202A312 to 202A364 (straight, long version)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are with or without coating available.

As supplied

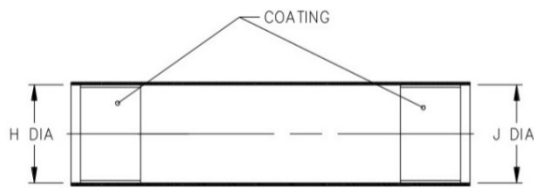

After heating

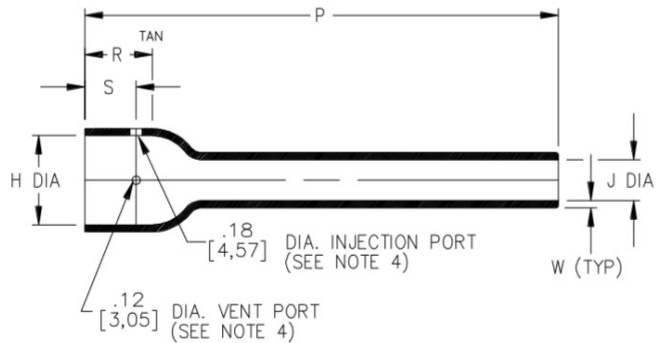

Dimensions in mm

Injection and vent port available only on request

Part number	Inside diameter (coating reduces Ø max. 1.5mm)				P	R	S	W		
	As supplied		After heating						Tolerance +/-10%	+/- 20%
	H	J	H	J						
202A312	20.1	20.1	16.3	6.1	127.0	15.7	12.7	2.03		
202A322	24.4	24.4	16.3	7.1	127.0	15.7	12.7	2.03		
202A333	30.5	30.5	20.1	8.9	146.1	15.7	12.7	2.29		
202A343	41.1	41.1	25.4	10.2	162.1	22.4	19.3	2.29		
202A354	52.1	52.1	32.0	14.7	179.3	25.4	19.3	2.54		
202A364	66.8	66.8	41.4	17.8	179.3	25.4	19.3	2.54		

Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-3	Polyolefin, semi-rigid	-55°C to +135°C
-4	Polyolefin, flexible	-55°C to +135°C
-12	Fluoroelastomer, flexible	-55°C to +200°C
-25	Elastomer, fluid resistant	-75°C to +150°C
-100	Polyolefin, halogen free	-30°C to +105°C

Coating, Adhesive

Ordering code	Material	Operating temperature range
/42	Polyamide, hot-melt	-20°C to +60°C
/86	High performance, hot-melt	-55°C to +120°C
/225	Epoxy/Polyamide	-75°C to +150°C

Colour

Ordering Code	Colour
-0	Black