



Moulded Parts 202E334 to 202E346 (straight, Slim Line)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are with or without coating available.

As supplied

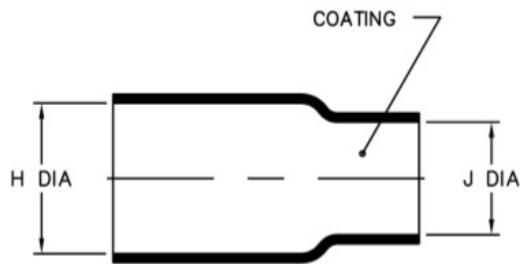

After heating

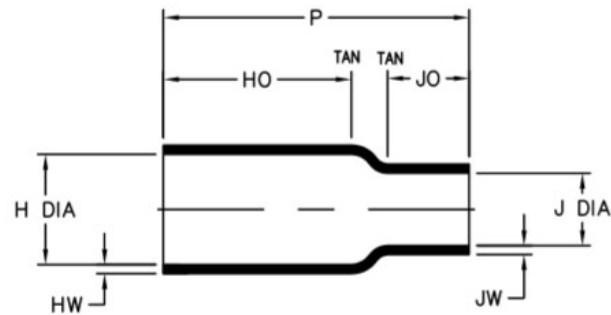

Dimensions in mm

Part number	Inside diameter (coating reduces Ø max. 1.5mm)				P	H0	J0	HW	JW
	As supplied		After heating						
	H	J	H	J	Tolerance +/- 10%			+/- 25%	
202E334	12.7	11.2	10.7	2.8	63.5	41.1	15.7	1.52	1.52
202E336	20.8	20.6	10.7	5.3	63.5	41.1	16.5	1.52	1.52
202E344	22.1	11.2	18.8	2.5	53.3	27.9	15.7	2.29	1.52
202E346	22.1	20.6	18.8	7.9	53.3	27.9	14.0	2.29	1.52

Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-3	Polyolefin, semi-rigid	-55°C to +135°C
-4	Polyolefin, flexible	-55°C to +135°C
-12	Fluoroelastomer, flexible	-55°C to +200°C
-25	Elastomer, fluid resistant	-75°C to +150°C
-100	Polyolefin, halogen free	-30°C to +105°C

Coating, Adhesive

Ordering code	Material	Operating temperature range
/42	Polyamide, hot-melt	-20°C to +60°C
/86	High performance, hot-melt	-55°C to +120°C
/225	Epoxy/Polyamide	-75°C to +150°C

Colour

Ordering Code	Colour
-0	Black