



Moulded Parts 208A011 to 208A098 (straight)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are with or without coating available.

As supplied

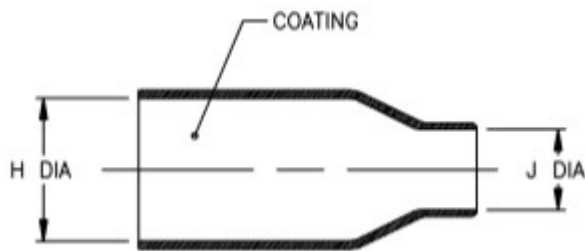

After heating

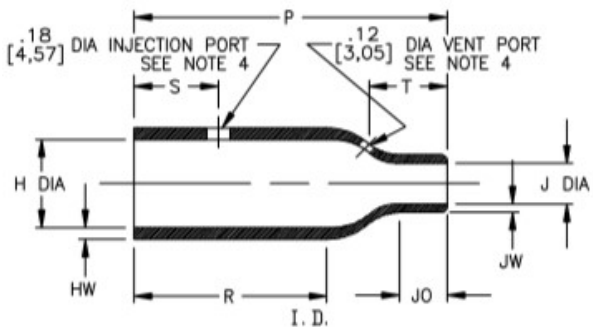

Dimensions in mm

Injection and vent port available only on request

Part number	Inside diameter (coating reduces \varnothing max. 1.5mm)		P	R	S	T	HW / JW		
	As supplied	After heating							
	H	J	H	J	Tolerance +/- 10%			+/- 20%	
208A011	10.7	4.6	7.9	2.0	25.1	14.5	12.7	N/A	1.27 / 1.02
208A021	13.7	6.6	10.4	3.0	38.4	21.3	19.1	N/A	1.52 / 1.02
208A032	19.3	8.1	14.2	4.1	53.8	34.5	19.1	11.4	2.03 / 1.27
208A042	23.9	11.7	18.0	5.6	64.8	37.1	19.1	16.26	2.54 / 1.52
208A053	30.0	14.7	22.4	7.1	76.2	42.2	19.1	22.9	3.05 / 1.78
208A064	37.8	19.1	28.2	9.1	97.8	59.7	19.1	30.	3.81 / 2.03
208A075	47.0	35.6	35.1	16.3	127.0	68.6	25.4	44.5	4.57 / 3.30
208A086	59.4	43.7	44.5	20.8	158.8	91.4	25.4	52.1	5.59 / 4.57
208A098	81.3	55.6	57.2	26.7	205.5	118.1	25.4	81.3	7.11 / 4.83

Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-3	Polyolefin, semi-rigid	-55°C to +135°C
-4	Polyolefin, flexible	-55°C to +135°C
-12	Fluoroelastomer, flexible	-55°C to +200°C
-25	Elastomer, fluid resistant	-75°C to +150°C
-100	Polyolefin, halogen free	-30°C to +105°C

Coating, Adhesive

Ordering code	Material	Operating temperature range
/42	Polyamide, hot-melt	-20°C to +60°C
/86	High performance, hot-melt	-55°C to +120°C
/225	Epoxy/Polyamide	-75°C to +150°C

Colour

Ordering Code	Colour
-0	Black