



D-100-00 to D-104-00 Solder sleeve shield terminator

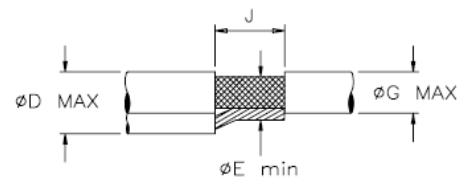

Temperature

Operating range -55°C to +150°C

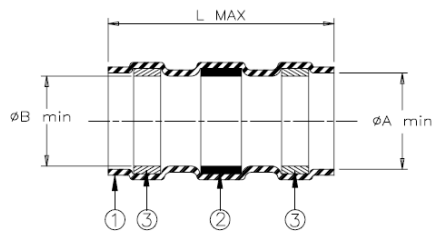

- ① Heat shrink tube, transparent blue, cross-linked polyvinylidene fluoride (PVDF)
- ② Solder Sn63 Pb37 solder alloy, mildly activated rosin flux, thermal indicator: red
- ③ Meltable sealing rings, grey

Dimensions in mm

Part Number	Product Dimensions			Wire Dimensions			
	L	Ø A	Ø B	Ø D	Ø E	Ø G	J
	max.	min.	min.	max.	min.	max.	+/- 0.5
D-100-00	17.25	2.80	3.15	3.15	1.40	2.70	7.00
D-101-00	17.25	4.55	5.00	5.00	2.50	4.55	7.00
D-103-00	20.50	7.11	7.62	7.62	4.06	7.11	7.00
D-104-00	29.75	10.80	11.65	11.43	5.70	-	9.00