



Moulded Parts 202D921 to 202D963 (straight, lipped)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are available with or without coating.

As supplied

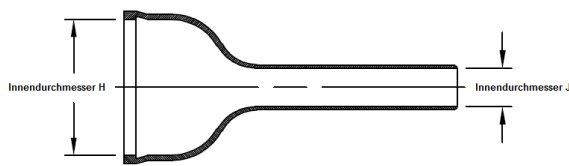

After heating

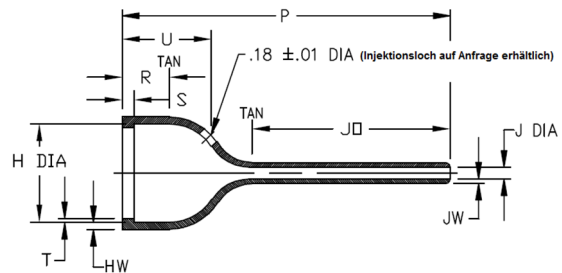

Dimensions in mm

Injection and vent port available only on request

Part number	Inside diameter (coating reduces Ø max. 1.5mm)					P	R	S	T	U	JØ	HW	JW
	As supplied		After heating										
	H	J	H, -3, -4, -25	H, -100	J								
202D921	19.30	13.00	9.30	4.50	2.10	60.20	11.70	3.00	1.00	15.70	37.60	1.50	1.14
202D932	26.10	19.10	7.60	5.50	2.60	74.20	12.20	3.00	1.00	20.30	45.00	1.80	1.14
202D953	34.20	26.00	9.60	6.60	3.10	84.30	12.20	3.00	1.00	20.90	51.10	1.80	1.14
202D963	43.60	34.10	11.40	7.80	3.60	99.60	12.20	3.00	1.65	26.20	57.70	1.80	1.14

Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-3	Polyolefin, semi-rigid	-55°C to +135°C
-4	Polyolefin, flexible	-55°C to +135°C
-12	Fluoroelastomer, flexible	-55°C to +200°C
-25	Elastomer, fluid resistant	-75°C to +150°C
-100	Polyolefin, halogen free	-30°C to +105°C

Coating, Adhesive

Ordering code	Material	Operating temperature range
/42	Polyamide, hot-melt	-20°C to +60°C
/86	High performance, hot-melt	-55°C to +120°C
/225	Epoxy/Polyamide	-75°C to +150°C

Colour

Ordering Code	Colour
-0	Black