



Moulded Parts 222A313 to 222A355 (right angled, long version)

These moulded parts or heat shrink boots are used for mechanical protection and cable strain relief. This version is ideal for cable harness applications where cable branches and breakouts are required. Our moulded parts combine an easy and quick installation with high electric strength, mechanical toughness and chemical and environmental resistance. These moulded parts are with or without coating available.

As supplied

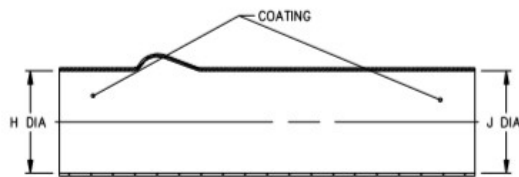

After heating

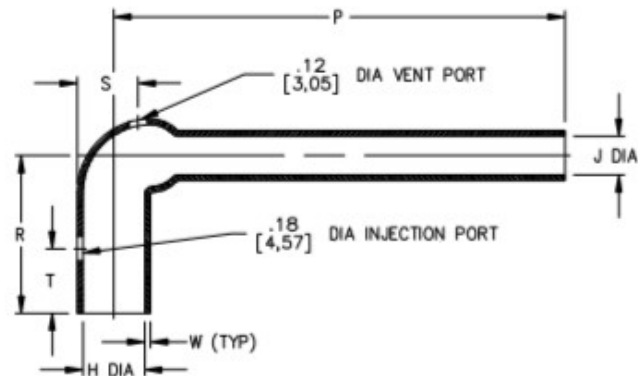

Dimensions in mm

Injection and vent port available only on request

Part number	Inside diameter (coating reduces Ø max. 1.5mm)				P	R	S	T	W		
	As supplied		After heating							Tolerance +/-10%	
	H, -3, -4, -25	H, -12	J, -3, -4, -25	J, -12	H	J					
222A313	29.5	25.9	29.5	16.5	13.0	8.1	127.0	31.8	13.5	12.7	2.29
222A324	34.5	31.2	34.5	19.3	15.5	9.7	139.7	38.1	16.3	19.1	2.29
222A334	36.6	32.0	36.6	19.8	16.3	10.2	152.4	41.2	17.0	19.1	2.29
222A345	43.7	35.8	43.7	23.4	19.6	12.2	165.1	47.5	20.3	19.1	2.29
222A355	54.9	44.2	54.9	29.0	24.4	15.2	177.8	62.0	24.1	25.4	2.29

Material (not all combinations available)

Ordering Code	Material	Operating temperature range
-3	Polyolefin, semi-rigid	-55°C to +135°C
-4	Polyolefin, flexible	-55°C to +135°C
-12	Fluoroelastomer, flexible	-55°C to +200°C
-25	Elastomer, fluid resistant	-75°C to +150°C
-100	Polyolefin, halogen free	-30°C to +105°C

Coating, Adhesive

Ordering code	Material	Operating temperature range
/42	Polyamide, hot-melt	-20°C to +60°C
/86	High performance, hot-melt	-55°C to +120°C
/225	Epoxy/Polyamide	-75°C to +150°C

Colour

Ordering Code	Colour
-0	Black