

Certified Miniforce tools for un-insulated terminals 0.5 - 10 mm²



Technical data:

- unique mechanism that reduces maximum handle force with 30% compared to the earlier Exx version
- ratchet system to guarantee a fully closed crimp
- release mechanism if the crimping sequence must be interrupted
- distinctly marked die nests
- adjustable if changes occur, ie after many crimps
- tested with Elpress terminals
- ergonomically designed handles to fit all users
- optimises the crimp quality
- reduces the risk for repetitive strain injuries (RSI)
- light and handy design without reduction in durability
- type C has extra long handles for comfortable two-hand grip
- at least 80.000 crimps
- delivered with certificate for quality assurance

Crimp range 0.5 - 6 mm²

GRB0560L and GRB0560LC

Elpress Miniforce crimp tools for roll crimping of un-insulated terminals.

Type L crimp tools are supplied with **three exchangeable locators** for receptacle terminals (see table).

Type LC has locators and long handles.

Particulars:

- supplied in a practical and rigid plastic box
- the L and LC type tool has locators - your "third hand" - to hold the terminals in the right crimp position, which simplifies quality performance considerably


GRB0560L



GRB0560LC



Crimp type

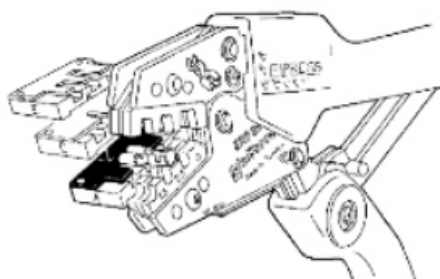

GRB0560-locator.

Locator	Marking
A	1. B1507FLS1 B1507FLSN
	2. B2507FLS1 B2507FLSN
	3. B4607FLSN B4607FLS1
C	1. B1507H B2507HN
	2. B2507HN
	3. B4607HN
E	1. B1505FLS (5 or 8) -1
	2. B2505FLS (5 or 8) -1

Area	Cat. no.	Crimp type	Weight	Length x Width
0.5-6 mm ²	GRB0560L	roll	0.860 kg	203 x 76 mm
0.5-6 mm ²	GRB0560LC	roll	0.920 kg	256 x 80 mm

GRB0560



GRB0560C



Crimp type



GRB0560 and GRB0560C

Elpress Miniforce crimp tool for roll crimping of un-insulated terminals. Similar to GRB0560C and GRB0560LC but without locators or carry box.

Area	Cat. no.	Crimp type	Weight	Length x Width
0.5-6 mm ²	GRB0560	roll	0.433 kg	203x 76 mm
0.5-6 mm ²	GRB0560C	roll	0.493 kg	256 x 80 mm

Crimp range 4 - 10 mm²

GWB4099 and GWB4099C

Miniforce crimp tools for W-indent crimping of un-insulated, closed barrel ring, fork, pin and tube terminals and connectors as well as tube terminals and through connectors type KR and KS.

Type C with long handles.

GWB4099



GWB4099C



Crimp type



Area	Cat. no.	Crimp type	Weight	Length x Width
4-10 mm ²	GWB4099	W-crimp	0.418 kg	203 x 76 mm
4-10 mm ²	GWB4099C	W-crimp	0.478 kg	256 x 80 mm

GWB4010 and GWB4010C

Miniforce crimp tools for W-indent crimping of un-insulated terminals type KR/KRT and KS/KST.

Type C with long handles.

GWB4010



Crimp type



Area	Cat. no.	Crimp type	Weight	Length x Width
4-10 mm ²	GWB4010	W-crimp	0.418 kg	203 x 76 mm
4-10 mm ²	GWB4010C	W-crimp	0.478 kg	256 x 80 mm

